

产品展示(Product Display):



CN/JP/US/TW




EU/KR



UK

机械规格(Mechanical Spec):

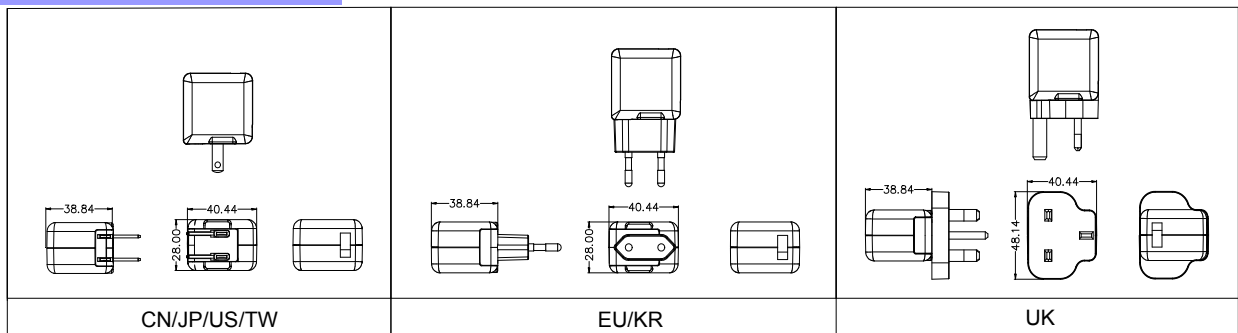

产品集锦(Product Highlights):

- ☑ 低能耗(Low Energy Consumption)
CEC Level 5, Energy Star 2.0
- ☑ 体积小/重量轻(Ultra Small Size/Light Weight)
- ☑ 适用LED照明,点读机/笔,手机,显示或相框,网络和USB设备等
Suit LED Lighting, Point Reading Machine/Pen, M.P, Display or Photo Frame, Network and USB Devices etc.

电气规格(Electrical Spec):

- ☑ 输入电压/电流/频率 (Input Voltage/Current/Frequency):
AC 100-240V (90-264V), 50/60Hz (47/63Hz), 0.15A Max.
- ☑ 输出功率(Output Power): 5W
- ☑ 输出电压(Output Voltage): 3-15V
- ☑ 输出电流(Output Current): 0.1-1A
- ☑ 负载范围(Load Regulation): $\pm 5\%$
- ☑ 高压测试(Hi-Pot Test): AC 3000V/1 Min/ 5mA
- ☑ 绝缘阻抗(Insulation Resistance): DC 500V 100M Ω
- ☑ 效率(Efficiency): 68%MIN

保护功能(Product Protection):

- ☑ 短路保护(Short Circuit Protection)
- ☑ 过压保护(Over Voltage Protection)
- ☑ 过流保护(Over Current Protection)

安规认证(Safety Approvals):

- ☑ CCC
- ☑ CE ☑ GS ☑ BS
- ☑ UL/CUL ☑ FCC ☑ BSMI ☑ PSE
- ☑ KC/KCC

可靠性测试(Reliability Test):

- ☑ 平均无故障时间(MTBF): 30000 hours @ 25 $^{\circ}$ C
- ☑ DC头插拔测试(DC Jack Plug In/Out):
3000 次,无接触不良(No bad contact)
- ☑ 跌落测试;在1米高度上,将充电器跌落到30mm木板上,
每面各1次,产品无裂缝(裂开), 无部件松动。
Drop In: Single free drop from 1m to 30mm wood board,
apply one times on each surface, components are not
break off.
- ☑ 老化测试(Burn-In Test): load, 2 hours
- ☑ 工作温度/湿度(Operating Temperature/Humidity):
-5 $^{\circ}$ C to 40 $^{\circ}$ C, 5% to 90% RH
- ☑ 储存温度/湿度(Storage Temperature/Humidity):
-20 $^{\circ}$ C to 70 $^{\circ}$ C, 5% to 95% RH

包装方式(Packing Method):

- ☑ PE袋+纸箱 (PE Bag+Carton)